

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
26 September 2002 (26.09.2002)

PCT

(10) International Publication Number  
**WO 02/074609 A1**

(51) International Patent Classification<sup>7</sup>: **B62D 29/00**,  
25/00

(21) International Application Number: PCT/EP02/03158

(22) International Filing Date: 18 March 2002 (18.03.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0106911.1 20 March 2001 (20.03.2001) GB

(71) Applicant (for all designated States except US): **L & L  
PRODUCTS INC** [US/US]; 160 McLean Drive, Romeo,  
MI 48065 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **SHELDON, Simon**


[GB/GB]; 4 Heath Farm Close, Sudbrook, Grantham,  
Lines NG32 3SP (GB). **LE GALL, Eric** [FR/FR]; 9, rue  
Ampère, Duttlenheim, F-67129 Molsheim Cedex (FR).  
**BOURDIN, Jean-Philippe** [FR/FR]; 9, rue Ampère,  
Duttlenheim, F-67129 Molsheim Cedex (FR). **BIEBER,  
Serge** [FR/FR]; 9, rue Ampère, Duttlenheim, F-67129  
Molsheim Cedex (FR).

(74) Agent: **BAWDEN, Peter, Charles**; Bawden & Associates,  
4 The Gatehouse, 2 High Street, Harpenden, Herts AL5  
2TH (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD; GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,

[Continued on next page]

(54) Title: **STRUCTURAL FOAM**

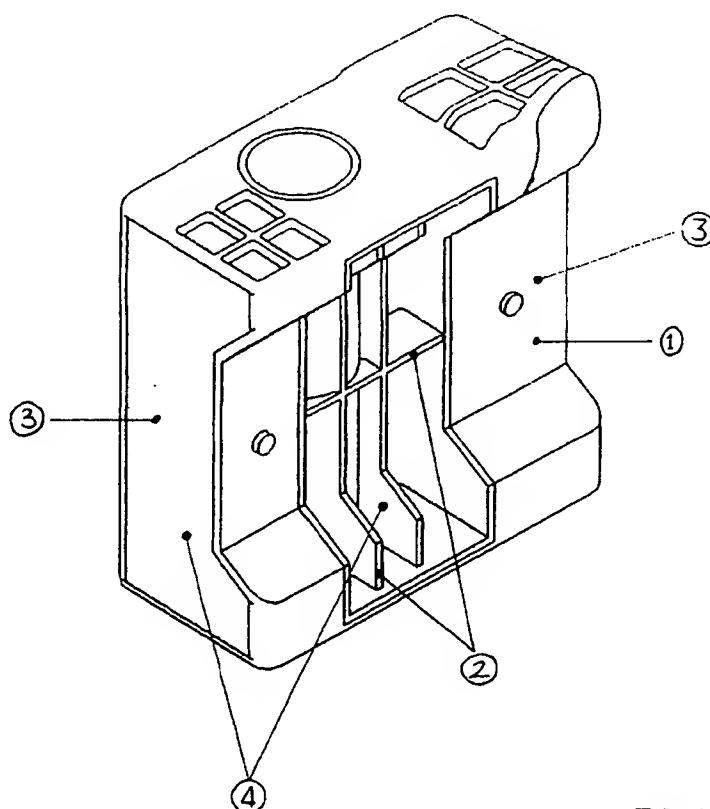

(57) Abstract: A structural reinforcement (1) for a hollow member comprising a rigid reinforcing member having a shape that substantially conforms to the cross section of the section of the hollow member to be reinforced with an expandable adhesive material (3) over at least a portion of the surface of said rigid reinforcing member sufficient to bond the reinforcing member to at least two non parallel internal surfaces of the structure.

WO 02/074609 A1

BEST AVAILABLE COPY



SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,  
VN, YU, ZA, ZM, ZW.

(84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## STRUCTURAL FOAM

The present invention relates to reinforcing materials and in particular to reinforcing materials that can be provided in hollow cross-sectional members particularly to  
5 provide reinforcement to improve the structural integrity of vehicles. The invention further provides a system whereby reinforcement can be provided whilst ensuring effective provision of an anti-corrosion coating on the inner surface of the hollow cross-sectional member by the electrocoat process. The electrocoat process used in vehicle manufacture is a process in which the vehicle structure is passed through a  
10 bath of anticorrosion fluid and the vehicle is used as an electrode whereby an anticorrosion coating is deposited from the fluid onto the vehicle structure by electrolysis.

The trends in motor vehicle design are towards lighter vehicles to improve fuel  
15 consumption. At the same time the safety standards and requirements are becoming more rigorous as indicated by the European Union requirements and the Euro-NCAP impact testing. The use of lighter materials such as aluminum to produce the hollow cross-sectional members that are used as vehicle sub frames has lead to the need for additional reinforcement. There is a need for reinforcement in various locations in  
20 the vehicle structure including the sub frame and upper structure and the form of reinforcement required can vary from one location in the vehicle to another and from vehicle to vehicle. The present invention therefore improves the strength of vehicles structures made from existing materials and enables vehicle structures based on lighter materials to satisfy safety requirements they are otherwise unable to satisfy.

25

There are four main types of application where structural reinforcement is required in vehicles. Crash protection where the prevention of vehicle body deformation is important to provide protection for the occupants. Energy absorption to enhance

performance after yield. The reduction of flexing or body movement in the vehicle structure particular to improve durability and reduce stress cracking and the point mobility problems requiring the reduction of resonance by the provision of stiffening. The need for reinforcement is present irrespective of the materials that are used to produce the vehicle structure and the need varies from material to material according to the nature of the reinforcement that is being provided. The reinforcing parts can also reduce the noise created by the motion of a vehicle by having a sound deadening effect as a result of blocking air paths in cavities.

- 10 It is known to provide longitudinal reinforcing structures within the hollow cross sections of vehicles. For example, PCT Publication WO97/43501 provides a beam, which can be mounted within the cross section to provide reinforcement along one axis in a hollow structure. The beam is provided with an expandable adhesive on two surfaces, which can be foamed upon heating to bond the beam to two opposed walls of the cross section. This technique is not suitable for use in the electrocoat process. Furthermore, the beam will only provide significant reinforcement along the axis of the beam. In WO97/43501 the beam with foamable material on opposed surfaces is placed in the cavity and subsequently foamed under the action of heat. This will result in uneven foaming and to non-uniform foam structures since on the underside the foam must raise the weight of the beam whereas expansion on the topside is free.

- It is also known to provide foamable plastic mouldings within the hollow cross sections which can be foamed upon application of heat, such as is provided by the baking step in the electrocoat process, to provide a foamed baffle that fills the cross-section to provide sound adsorption. Such systems are described in European patent applications 0383498 and 0611778. The foam baffle provides sound deadening and vibration resistance. In these systems the entire insert is foamable

and it is proposed that the foamable material be chosen so that it will foam during the baking process, which follows the electrocoat process typically used in vehicle manufacture to provide resistance to metal corrosion. The materials of these patents are not however reinforcing materials but are used to provide acoustic baffles and  
5 seals.

In the electrocoat process a vehicle structure is immersed in a bath of coating fluid from which an anticorrosion coating is deposited on the metal by electrolysis. The vehicle metal structure is subsequently heated to bake the coating on the metal. The  
10 electrocoat process is typically applied to complete vehicle structures in which hollow sections have been capped. Accordingly reinforcing structures are preferably provided within hollow sections prior to the electrocoat. It is therefore important that the reinforcing structure have minimal impact on the operation and efficiency of the electrocoat process.

15 Where reinforcing materials have been provided they have either been stuck to the metal structure prior to subjecting the vehicle structure to the electrocoat process or have been provided after the electrocoat process. The former technique has the problem that it is not possible to perform the electrocoat over the entire surface,  
20 which can lead to local areas of corrosion. The latter technique is cumbersome and requires the provision of fastening means after electrocoating, which can damage the electrocoat and again lead to local areas of corrosion.

There is therefore a need to provide structural reinforcement for the hollow cross-  
25 sections of vehicles, which is easily supplied, works well within the bounds of the electrocoat process and provides effective reinforcement to the vehicle both during operation and as crash protection.

The present invention therefore provides a structural reinforcement for a hollow member comprising a rigid reinforcing member having a shape that substantially conforms to the cross section of the section of the hollow member to be reinforced with an expandable adhesive material over at least a portion of the surface of said

5 rigid reinforcing member sufficient to bond the reinforcing member to at least two non parallel internal surfaces of the structure.

The dimensions of the rigid reinforcing member and the thickness and nature of the expandable material are critical to the achievement of the desired structural

10 reinforcement. The exterior shape of the reinforcing member should conform substantially to the cross section of the section of the automotive structure it is designed to reinforce. The shape may vary along the length of the reinforcing member as the dimensions of the cross section of the structure change. The size of the reinforcing member including the expandable adhesive material should be such

15 that there is a small clearance between the extremity of the reinforcing member and the interior walls of the frame of the vehicle to allow for passage of the electrocoat fluid. The reinforcing member has a cellular, honeycomb or ribbed internal structure to provide reinforcement along several different axes.

20 The structural reinforcing member is also provided with small lugs, which enable it to stand away from the interior walls of the sections of the vehicle. In this way fastening devices are not required and the area of contact between the structural reinforcing member and the interior walls of the frame of the vehicle is minimized. The clearance between the extremity of the reinforcing member and the interior walls of

25 the frame of the vehicle must be wide enough to enable the liquid used in the electrocoat bath to flow between the reinforcing member and the interior walls of the sections of the vehicle in sufficient quantity to enable an effective anti-corrosion coating to be deposited. On the other hand, the clearance must not be too wide

since this can result in a lack of rigidity in the structure when the expandable adhesive is foamed to fill the clearance and bond the structural reinforcing member to the interior walls of the frame of the vehicle. We prefer that the clearance be no more than 1 centimeter and is more preferably 3 to 10 millimeters. The clearance  
5 around the whole structure enables a more uniform foam structure to be obtained.

The rigid reinforcing member may be made from any suitable material, for example it may be made of metal or plastic and the material will be chosen according to the preferred fabrication method. This in turn is driven by economics and the complexity  
10 of the cross section to be reinforced. Reinforcing members for simple cross sections may be prepared by extrusion whilst injection moulding may be required for more complex structures. Metal members may be produced by stamping and/or forming. Where extrusion is used the members may be of metal or thermoplastics; where injection moulding is used thermoplastics are preferred. Polyamides, particularly  
15 glass filled polyamides are suitable materials due to their high strength to weight ratio. Alternatively injection moulding or die casting of metal alloys may be employed. It is preferred that the moulding is provided with means enabling fluid drainage. For example, holes may be provided in the moulding to allow the drainage of water, which may condense in the structure over time.

20

The preferred shape and structure of the reinforcing member will depend upon where it is to be located in the vehicle structure and the function it is to perform. For example, if it is to be located in the front longitudinal section of the vehicle it will be designed for crash or impact resistance. On the other hand, it may be designed to  
25 reduce point mobility such as for example at the base of side and rear pillars. This is particularly important with high-sided vehicles where the reinforcement can reduce or prevent vehicle sway thus reducing metal fatigue. Other applications include the resistance of deformation of the rear longitudinal section, in particular to prevent

upward deformation from rear impact, which can prevent the doors from being opened thus trapping the occupants. Other parts of the vehicle which may be reinforced by the techniques of the present invention include roof structures, pillars, such as the A pillar, B pillar or C pillar, frame cross members and window frames  
5 particularly rear window frames.

The expandable adhesive material serves two main functions, it will expand to fill the space between the reinforcing member and the interior of the vehicle structure and it will also bond to the interior wall of the structure. Accordingly, expandable adhesive  
10 material means that the material can be activated to both expand (typically foam) and to act as an adhesive. Activation therefore enables the expandable material to expand and fill a gap between the reinforcing member and a hollow structure it is designed to reinforce and to bond to the internal surface of the hollow structure. Accordingly the expandable adhesive must expand at the desired temperature and  
15 be sufficiently adhesive to firmly bond the reinforcing member inside the vehicle structure. Once foamed it should be sufficiently strong that it does not contribute any weakness to the overall reinforcing effect provided.

Prior to activation, the expandable adhesive material should be dry and not tacky to  
20 the touch, since this facilitates shipping and handling and prevents contamination. Examples of preferred foamable materials include foamable epoxy-base resins and examples of such materials are the products L5206, L5207, L5208 and L5209, which are commercially available from L & L Products of Rome Michigan USA, and the Betacore Products BC 5204, 5206, 5205 and 5208 available from Core Products,  
25 Strasbourg, France. The product should be chosen according to the rate of expansion and foam densities required. It is further preferred that it expand at the temperatures experienced in the electrocoat baking oven, typically 130°C to 150°C.



The expandable adhesive material should be applied to at least a portion of the surface of the rigid reinforcing member that will be adjacent to an interior surface of the section of the vehicle frame that is to be reinforced. It is preferred that the foamable material be applied over at least part of all the surfaces of the reinforcing member that are adjacent to the interior surface of the vehicle section. This will depend upon the shape of the section to be reinforced but it should be present so that it provides adhesion to two non-parallel surfaces to give rigidity in at least two dimensions. It is preferred that the foamable material be applied over at least part of each of the top and bottom and the sides of the reinforcing member. In this way when the material is foamed it can expand to fill the gap around the entire surface of the reinforcing member that is adjacent to the interior walls. The expandable material may be applied to the rigid reinforcing member by bonding a strip of the material to the member, by extrusion coating or by injection moulding. Where the reinforcing member is made by injection moulding the expandable material may be applied by over-moulding or two shot injection moulding. The material should however be applied under conditions such that no foaming takes place.

It is preferred that the reinforcing member coated with the expandable material is located within the hollow member that it is designed to reinforce in a manner that provides a clearance between the external surface of the coated member and the internal surface of the hollow member. This allows for the passage of the electrocoat fluid between the member and the internal surface and also enables a uniform expansion of the foam around the member to provide more uniform reinforcement. Accordingly in a preferred process for providing reinforcement within hollow structures such as a vehicle frame, moulded reinforcing members with the layer of foamable adhesive thereon are installed during assembly of the vehicle frame. Locating lugs are preferably moulded into the reinforcing member or the expandable material so that the reinforcing member sits within the vehicle structure leaving a

space between the member and the interior walls of the cavity to be reinforced, in this way there is no need for fastening or bonding means to attach the member to the interior walls. The assembled structure is then subjected to the electrocoat process in which it is passed through a bath of coating material and a corrosion resistant coating is deposited onto the structure by electrolysis. The vehicle structure is then dried in an oven to provide the final coating and the expandable adhesive is preferably chosen so that it is activated by the drying conditions used in the oven employed to bake the coating on the electrocoat process. In this way the expandable material will expand under the drying conditions to provide a foam that fills the space between the member and the interior walls and will produce a strong bond between the reinforcing member and the interior wall. Typically the coated structure is dried at around 165°C for about 20 minutes and accordingly the adhesive should expand under these conditions. The industry is however looking to use lower drying temperatures and shorter drying times and this may influence the choice of expandable adhesive materials.

If other components for example bolts are to pass through the reinforcing members during subsequent assembly care must be taken to ensure that holes formed in the reinforcing member for the passage of the bolts are not blocked by the foam as it expands.

The techniques of the present invention may be used for the reinforcement of any construction that is based on a hollow frame structure. They may for instance be used in the construction industry, in boats, in aircraft, and in railroad applications. They are however particularly useful to provide reinforcement in automobiles including cars, trucks, caravans and the like. The techniques are particularly useful in the current trend towards using lighter and sometimes weaker materials in the production of automobile sub frames where there is a greater need for reinforcement

to compensate for the reduction in strength of the basic material and yet satisfy the safety requirements. This is particularly the case with the use of aluminum for the production of automobiles.

- 5 The present invention is illustrated by reference to the accompanying drawings in which Figure 1 shows a moulding according to the present invention.

Figure 1 is of a moulding designed to limit point mobility and prevent what is known as lozenging. The moulding consists of a reinforcing member 1 moulded to conform  
10 to the cross section of the front longitudinal section of a vehicle. The reinforcing member consists of a frame with transverse and longitudinal ribs 2 to provide compression strength and torsional resistance. The moulding has been over moulded at the two ends with layers of an expandable adhesive 3. Figure 2 is an end elevation of the moulding showing the lugs 4 which will locate the moulding  
15 within the vehicle cross section. Figure 3 is a cross section of the moulding shown in Figure 1 illustrating the cellular structure.

Figure 4 shows an alternate form of moulding which is suitable for resisting deformation particularly in the rear longitudinal section of a vehicle. This moulding is  
20 especially useful in the preventing the floor bending upwards upon rear impact, which can prevent the doors from being opened and trapping occupants in the vehicle.

The moulding shown in Figure 4 is a polyamide moulding 5, which is over-moulded in those areas, which are to be in proximity to the internal surface of the vehicle frame  
25 with a foamable structural foam material 6.

The moulding is designed to provide reinforcement at the position where the rear door pillar of the vehicle joins the vehicle floor frame. Figure 5 shows the piece in

position on the floor section 7 at the base of the rear door pillar 8 and Figure 6 is an expanded view of the moulding lying in position on the floor section 7.

When the vehicle assembly is completed it can be passed through the electrocoat  
5 process and when it is heated to bake the electrocoat coating the foamable structural  
foam will foam to come into contact with and to bond to the internal surface of the  
vehicle frame. In this way a firmly bound structural reinforcement is provided which  
resists upward movement of the floor portion of the vehicle due to rear impact  
collision and thus reduces the tendency for the rear doors to become stuck and  
10 prevent the occupants escaping.

## CLAIMS

1. A structural reinforcement for a hollow member comprising a rigid reinforcing  
5 member having a cellular, honeycomb or ribbed internal structure and having a  
shape that substantially conforms to the cross section of the section of the hollow  
member with an expandable adhesive material over at least a portion of the  
surface of said rigid reinforcing member sufficient to bond the reinforcing member  
to at least two non parallel internal surfaces of the hollow member wherein prior  
10 to activation, the expandable adhesive material is dry and not tacky to the touch  
said structural reinforcement being provided with small lugs on its outer surface,  
which enable it to stand away from the interior walls of the hollow member.
2. The structural reinforcement of Claim 1, whose size including that of the  
15 expandable adhesive material is such that there is a small clearance between the  
extremity of the reinforcing member and the interior walls of the hollow member.
3. The structural reinforcement according to Claim 1 or Claim 2, made from metal or  
plastic.
- 20 4. The structural reinforcement according to any of the preceding Claims, provided  
with means enabling fluid drainage.
5. The structural reinforcement according to any of the preceding Claims, in which  
25 the expandable adhesive material expands at the temperatures experienced in  
the electrocoat-baking oven.
6. The structural reinforcement according to any of the preceding Claims, in which  
the expandable material expands at from 130°C to 150°C.
- 30 7. A structural reinforcement according to any of the preceding Claims, in which the  
foamable material is applied over at least part of each of the top and bottom and  
the sides of the reinforcing member.
- 35 8. A structural reinforcement according to any of the preceding Claims, made by  
injection moulding.

9. A structural reinforcement according to any of the preceding Claims, in which the expandable adhesive material is applied by over moulding or two shot injection moulding.

5

10. A hollow member reinforced by a structural reinforcement according to any of the preceding claims wherein the expandable adhesive material has been expanded to bond the structural reinforcement to the interior surface of the hollow member.

10 11. A hollow member according to Claim 10, which is part of the frame of a vehicle.

12. A hollow member according to Claim 11, comprising the A pillar of a vehicle.


13. A hollow member according to Claim 11, comprising the B pillar of a vehicle.

15


14. A hollow member according to Claim 11, comprising the C pillar of a vehicle.

15. A hollow member according to Claim 11, comprising the front longitudinal section of a vehicle.

20

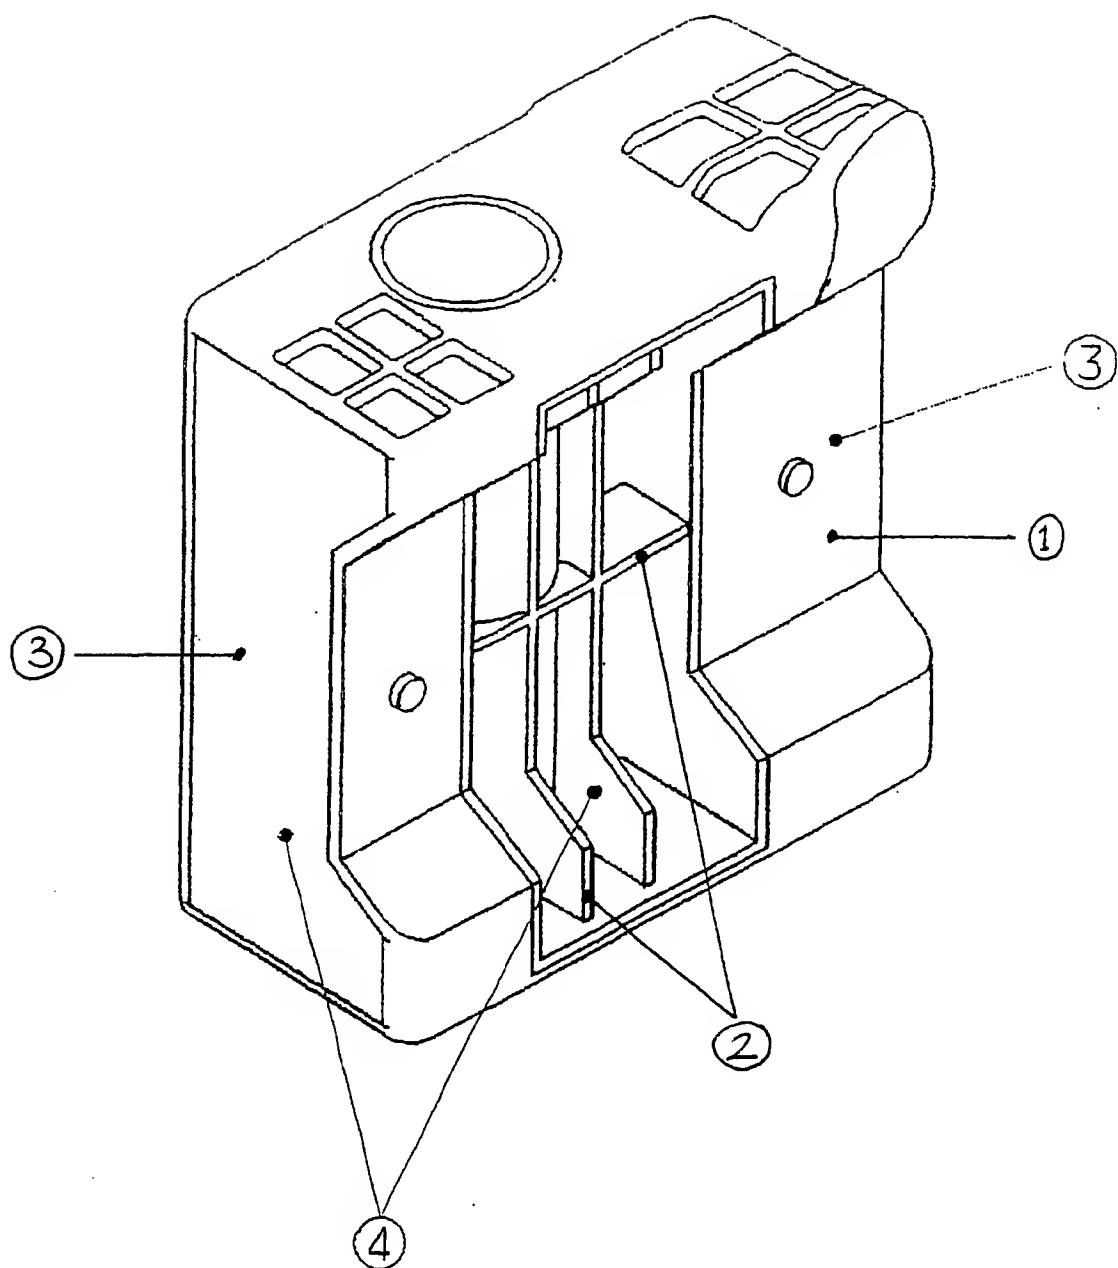


**FIGURE 1**

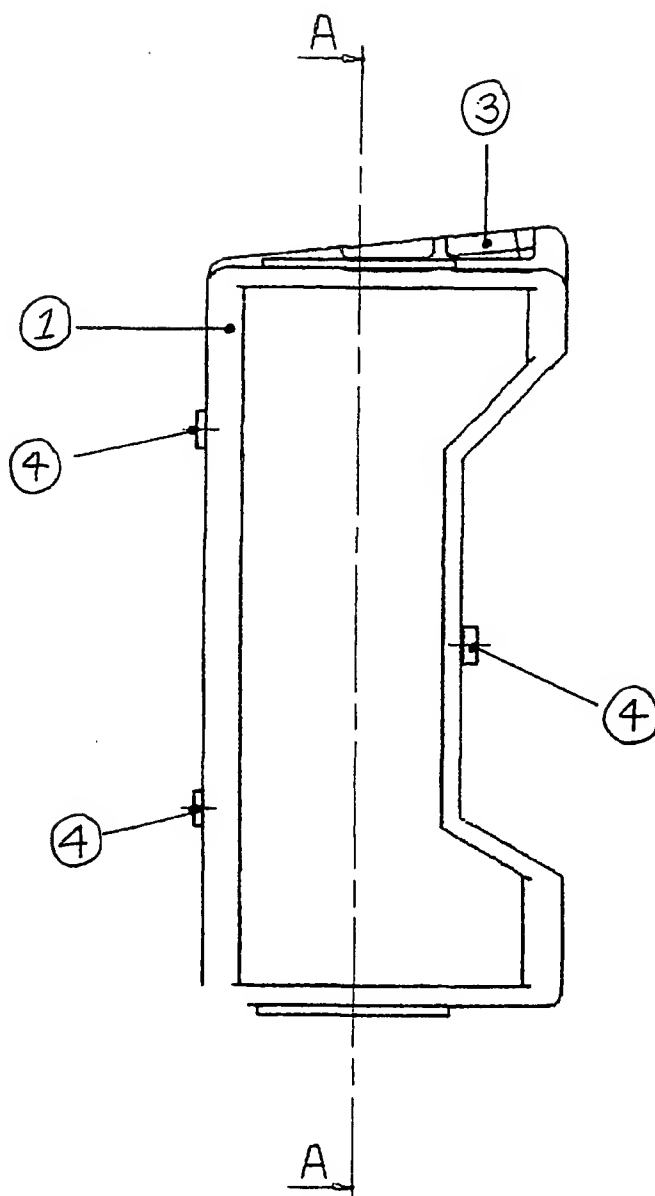


**FIGURE 2**




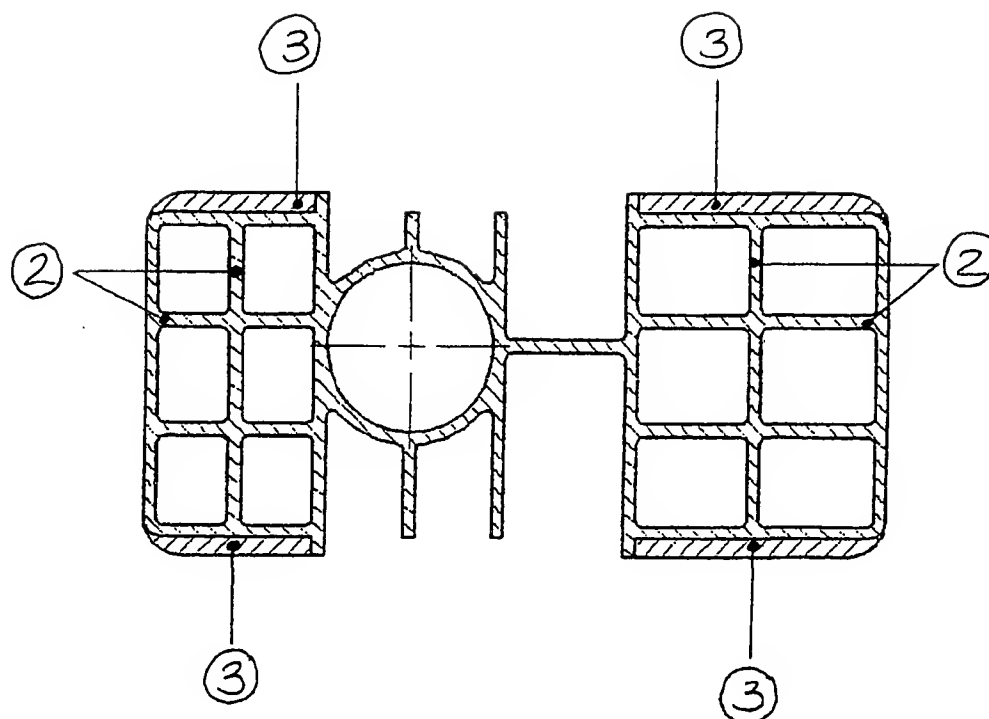


**FIGURE 3**

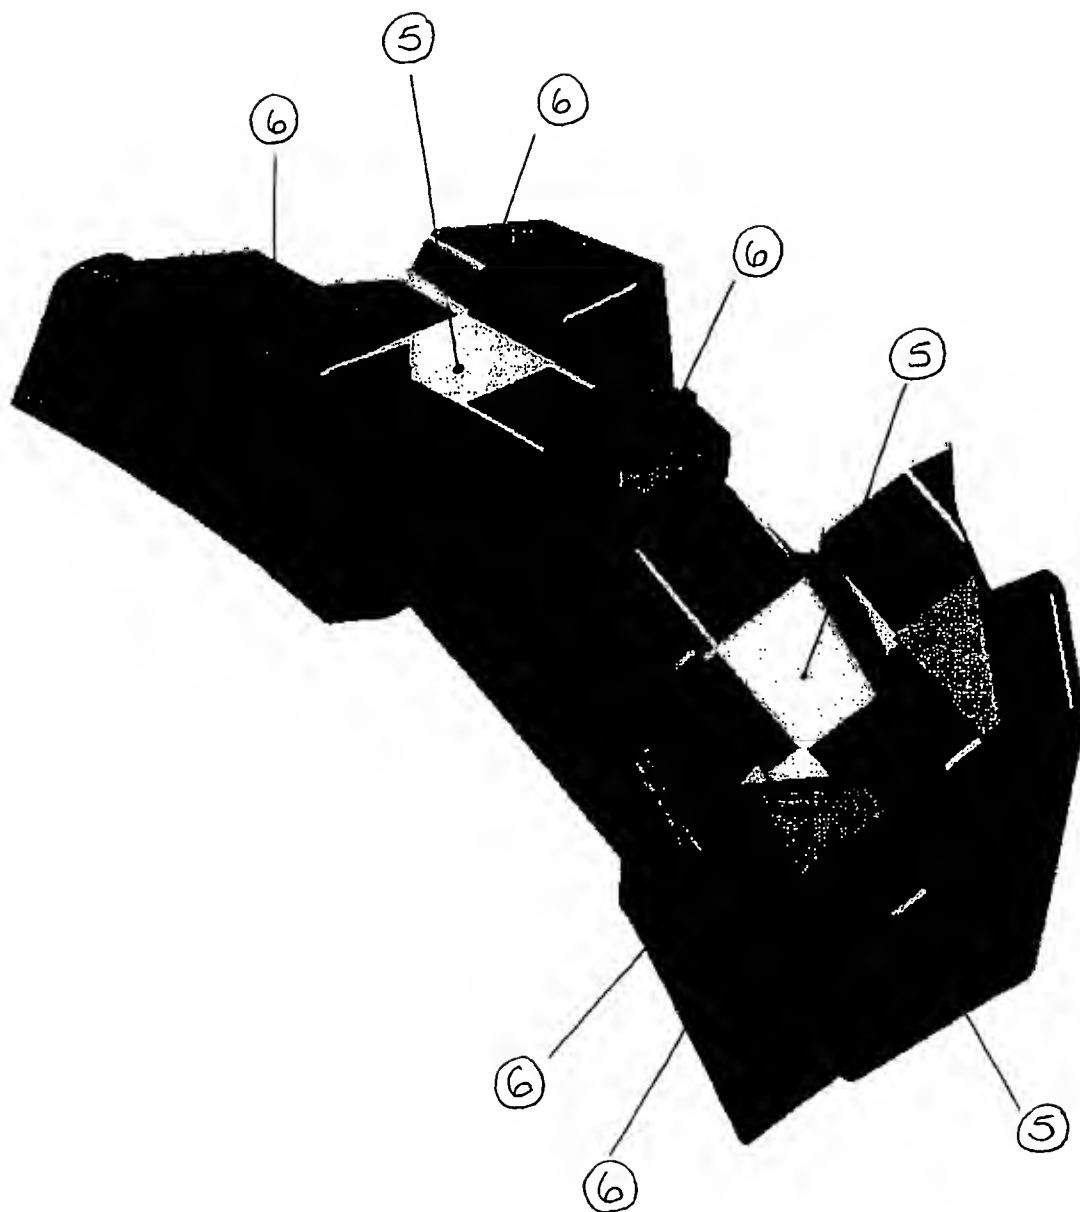

**FIGURE 4**

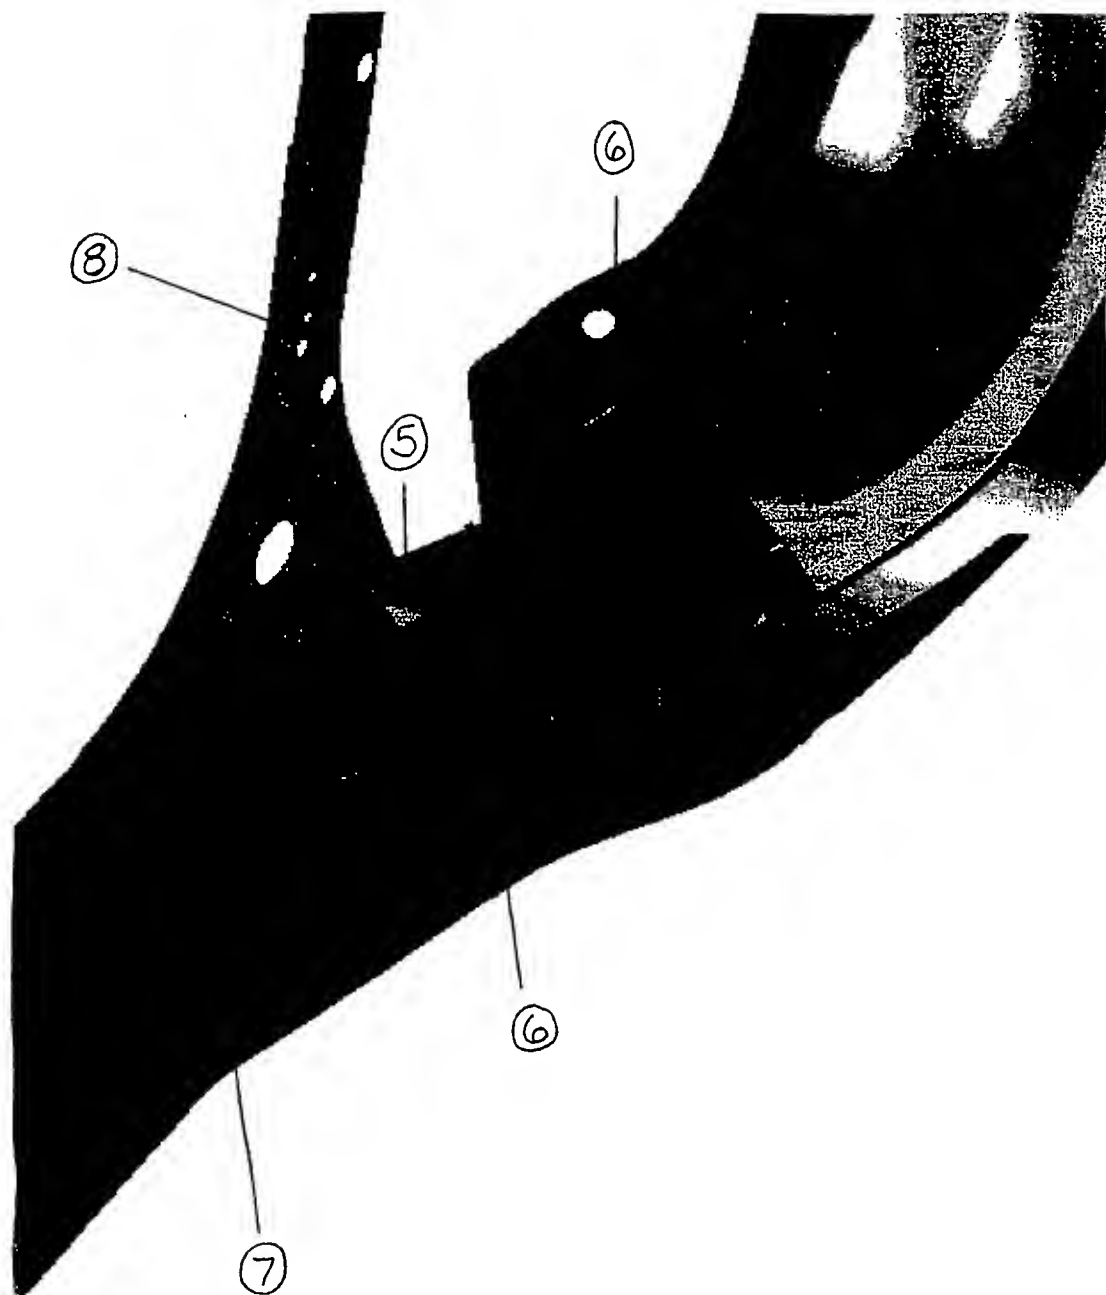

**FIGURE 5**

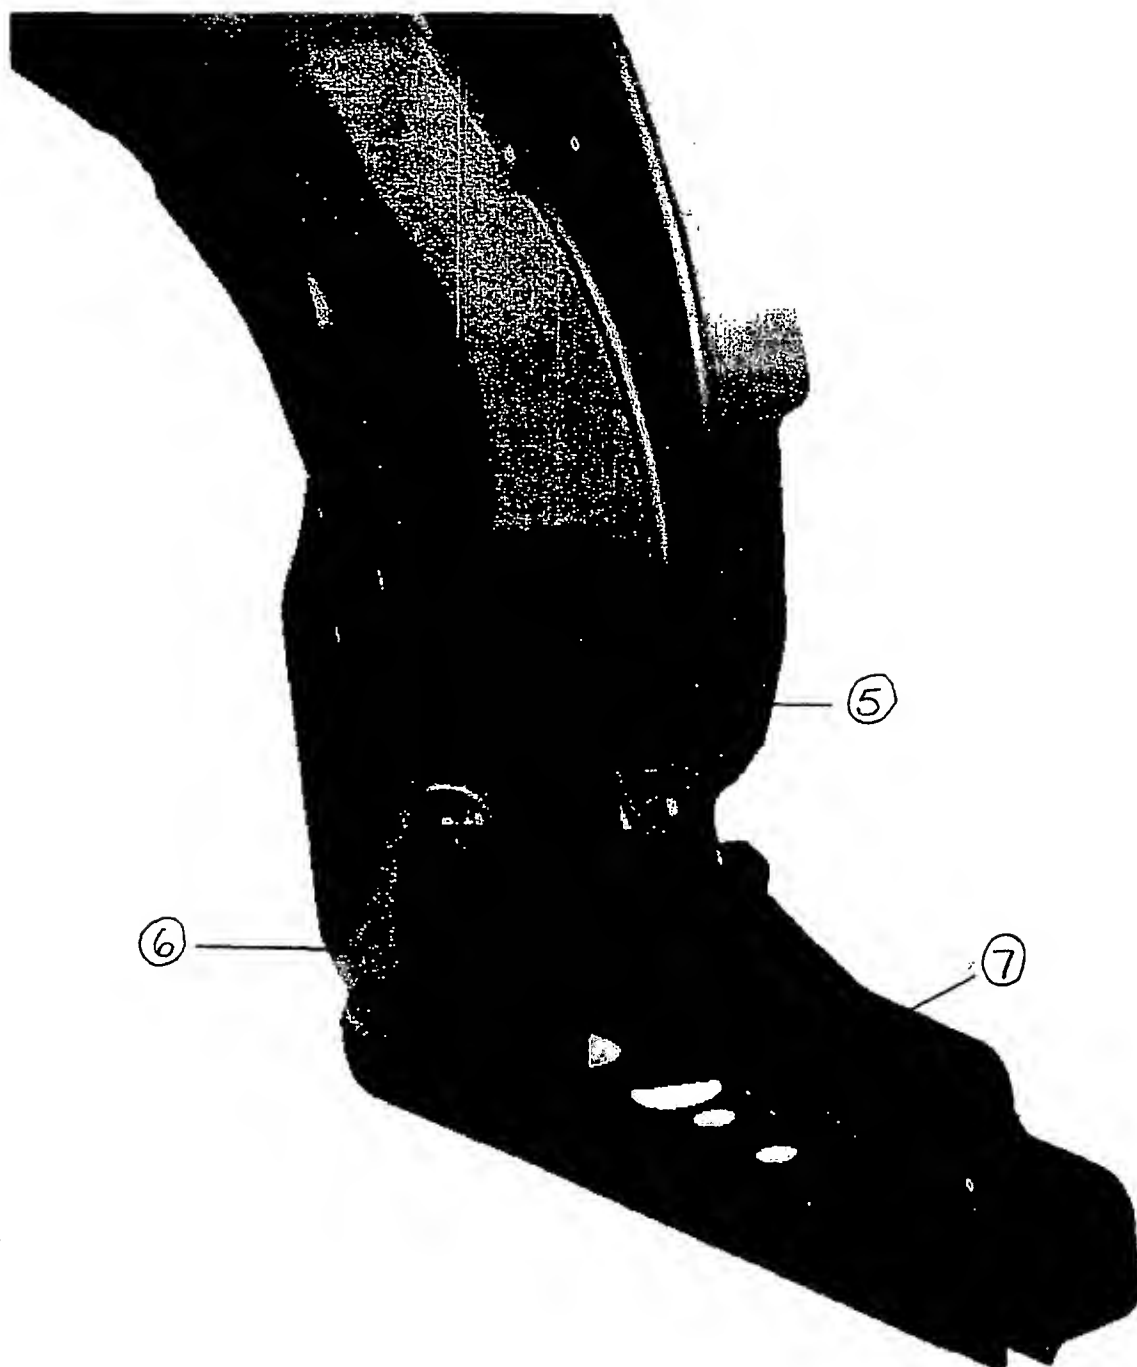

**FIGURE 6**

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 02/03158

**A. CLASSIFICATION OF SUBJECT MATTER**  
 IPC 7 B62D29/00 B62D25/00

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B62D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 198 58 903 A (OPEL ADAM AG) 21 June 2000 (2000-06-21) figures 1-3 column 1, line 67 -column 5, line 37 ---	1-3,5-7, 10-15
P,X	EP 1 122 152 A (SIKA CORP) 8 August 2001 (2001-08-08) figures 1-3,8,9,13 column 5, paragraph 9 -column 8, paragraph 19 column 10, paragraph 24 ---	1-3,7, 10,11,15
P,A	WO 01 83206 A (ROBERTS STEVE ;SIKA CORP (US); LJUBEVSKI PERO (US); LEVANDOWSKI PA) 8 November 2001 (2001-11-08) figures 1,2,10,13 page 5, line 16 -page 10, line 30 --- -/-	1-7,9-15

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents :

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*A\* document member of the same patent family

Date of the actual completion of the international search

19 August 2002

Date of mailing of the international search report

23/08/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

Deraymaeker, D

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 02/03158

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, A	WO 01 68394 A (L & L PRODUCTS INC) 20 September 2001 (2001-09-20) page 7, paragraph 2 -----	8
P, A	US 6 263 635 B1 (CZAPLICKI MICHAEL J) 24 July 2001 (2001-07-24) figure 3 column 2, line 36 -column 2, line 49 -----	9

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 02/03158

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 19858903	A	21-06-2000	DE 19858903 A1	21-06-2000
			AU 2277700 A	12-07-2000
			WO 0037302 A1	29-06-2000
EP 1122152	A	08-08-2001	US 6305136 B1	23-10-2001
			AU 3453101 A	07-08-2001
			EP 1122152 A2	08-08-2001
			WO 0155523 A1	02-08-2001
WO 0183206	A	08-11-2001	US 6413611 B1	02-07-2002
			AU 3984301 A	12-11-2001
			WO 0183206 A1	08-11-2001
WO 0168394	A	20-09-2001	AU 4193701 A	24-09-2001
			WO 0168394 A2	20-09-2001
			US 2002027379 A1	07-03-2002
US 6263635	B1	24-07-2001	AU 2082101 A	18-06-2001
			WO 0142076 A1	14-06-2001
			US 2001017018 A1	30-08-2001

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**